

High Performance Fluid Heating Solution Featuring Watlow's Thermal Spray Technology Improves System Performance



The new FLUENT® in-line heater from Watlow® is a small, lightweight, high-performance heater that can replace both a traditional immersion type heater or a heater wrapped around a tube as part of a thermal system. Watlow's FLUENT heater is designed as an integrated solution that replaces multiple components in a system. This heater design reduces overall system cost and complexity. Because of its high watt density, it offers ultra-fast response leading to higher system performance. Featuring Watlow's thermal spray technology, the heater makes use of its entire surface to produce heat, which optimizes heat transfer and temperature uniformity.

Features and Benefits

Small, lightweight, robust heater construction

- Replaces multiple components in a system
- Reduces overall system size
- Lowers total cost of ownership

Unique circuit patterning process

- Facilitates customizable heating profiles
- Enables distributed wattage and/or multiple zones
- Assures precise and repeatable power distribution

High watt density, low mass heater

- Contributes to fast response time
- Allows for efficient heat transfer
- Enables on-demand process start-up

Typical Applications

- Hemodialysis fluid heating
- Food cooking equipment
- Semiconductor purge gas heating
- Ink preheating systems
- On demand fluid heating

Watlow® and FLUENT® are registered trademarks of Watlow Electric Manufacturing Company.

UL® and cUL® are registered trademarks of Underwriter's Laboratories, Inc.

Powered by Possibility



To be automatically connected to the nearest
North American Technical Sales Office:


**1-800-WATLOW2 • www.watlow.com
inquiry@watlow.com**

International Technical Sales Offices:

China	+86 21 3532 8532	Italy	+39 02 4588841	Singapore	+65 6773 9488
France	+33 1 41 32 79 70	Japan	+81 3 3518 6630	Spain	+34 91 675 1292
Germany	+49 7253 9400 0	Korea	+82 2 2169 2600	Taiwan	+886 7 288 5168
India	+91 40 6661 2700	Mexico	+52 442 256 2200	UK	+44 115 964 0777

Specifications

- Substrate tube material: 444 SS
- Fitting and baffle material: 316L SS
- Voltage up to 240V
- Amperage up to 15A per zone
- Resistance tolerance +10%, -5%
- Typical maximum watt densities
 - Air 150 W/in² (23 W/cm²)
 - Water 450 W/in² (70 W/cm²)
- Maximum pressure: 150psi (10.2 bar)
- Maximum heater temperature: 250°C as measured by internal Type K T/C
- UL®/cUL® (pending) and CE

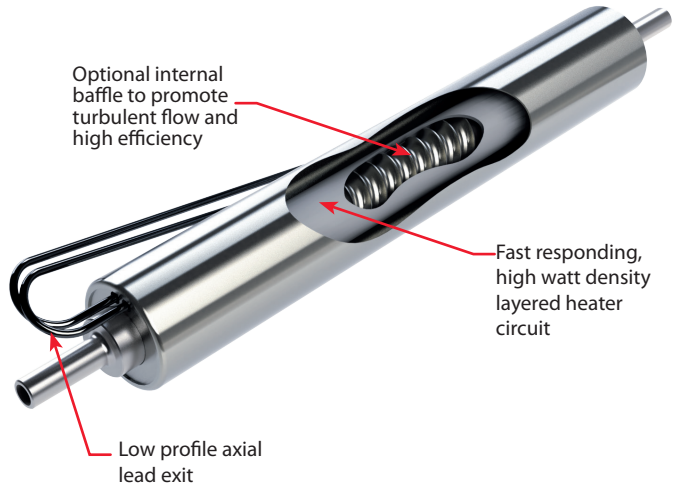

Standard Product Offering — (5 Day Lead Time)

Volts	Watts	Protection Tube Length in. (mm)	Number of Heating Circuits	Watt Density (W/in ²)
240	500	3.00 (76)	1	210
120	250	4.25 (108)	1	57
240	1,000	4.25 (108)	1	228
120	375	5.25 (133)	1	62
240	1,500	5.25 (133)	1	247
120	500	6.50 (165)	1	63
240	2,000	6.50 (165)	1	250
120	750	6.50 (165)	2	94
240	3,000	6.50 (165)	2	375
120	1,000	7.75 (197)	2	100
240	4,000	7.75 (197)	2	400
240	500	6.50 (165)	1	63

Note: Go to www.watlow.com/fluent for the latest list of standard designs and product information.

Application Orientation

Gas Heating—
(Any orientation)



Liquid Heating—
(Heater must be vertical with inlet at the bottom)



Inlet/Outlet Fitting Options

